


# SLX Transmitter

## Submersible Level Transmitter for Reliable Level Control

### FEATURES & BENEFITS

- Provides continuous level monitoring in level control applications
- Standard 4-20mA signal
- Transmitter wetted components are designed with nonconductive materials to provide electrical isolation barrier
- 18/2 shielded cable with vent tube
- Provided with removable lock-in-place stabilizing weight
- Reverse polarity protected
- Multiple ranges and cable lengths available
- Optional 6 hook bracket available
- Two-year limited warranty

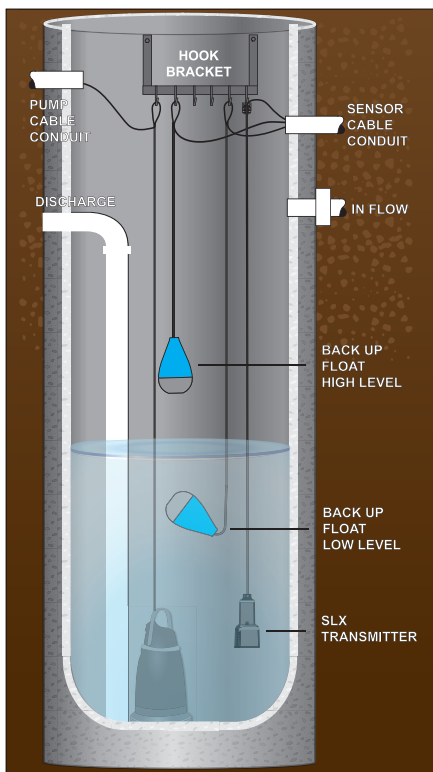

### SPECIFICATIONS

- **Measuring Ranges:** 7.25 PSI (16.7 ftWC) and 14.50 PSI (33.4 ftWC)
- **Accuracy:** 1% full scale
- **Operating Temperature:** 32-122°F (0-50°C)
- **Output:** 4-20mA, loop powered
- **Excitation Voltage:** 8-32 VDC reverse polarity protected
- **Overpressure Protection:** 58 PSI (133.6 ftWC)
- **IP Rating:** IP 68 for permanent submersion
- **Sensor Housing Dimensions:** 2.0" diameter x 5.62" length (51 mm x 143 mm)
- **Cable:** TPE, 18 AWG, 2-wire shielded with vent tube

Part Number	Description
1053719	SLX, 16.7 ftWC, 25 ft. cable
1053720	SLX, 16.7 ftWC, 50 ft. cable
1053723	SLX, 33.4 ftWC, 25 ft. cable
1053724	SLX, 33.4 ftWC, 50 ft. cable
1052813	6 hook bracket (optional)

**CSI** controls®

Toll Free: 1-800-363-5842

Phone: 419-281-5767 • Fax: 419-289-2535

[www.csicontrols.com](http://www.csicontrols.com)

9500310A ©2017 CSI Controls Rev 11/17