

# SLX Transmitter

Submersible Level Transmitter for Reliable Level Control


## FEATURES

- Provides continuous level monitoring in level control applications
- Standard 4-20mA signal
- Transmitter wetted components are designed with nonconductive materials to provide electrical isolation barrier
- 18/2 shielded cable with vent tube
- Reverse polarity protected
- Multiple cable lengths available
- Optional 6 hook bracket available
- Two-year limited warranty

## SPECIFICATIONS

- **Measuring Ranges:** 7.25 PSI (16.7 ftWC) and 14.50 PSI (33.4 ftWC)
- **Accuracy:** 1% full scale
- **Operating Temperature:** 32-122°F (0-50°C)
- **Output:** 4-20mA, loop powered
- **Excitation Voltage:** 8-32 VDC reverse polarity protected
- **Overpressure Protection:** 58 PSI (133.6 ftWC)
- **IP Rating:** IP 68 for permanent submersion
- **Sensor Housing Dimensions:** 2.0" diameter x 5.62" length (51 mm x 143 mm)
- **Cable:** TPE, 18 AWG, 2-wire shielded with vent tube

PART NUMBER	DESCRIPTION
1053719	SLX, 16.7 ftWC, 25 ft. cable
1053720	SLX, 16.7 ftWC, 50 ft. cable
1053723	SLX, 33.4 ftWC, 25 ft. cable
1053724	SLX, 33.4 ftWC, 50 ft. cable
1052813	6 hook bracket (optional)

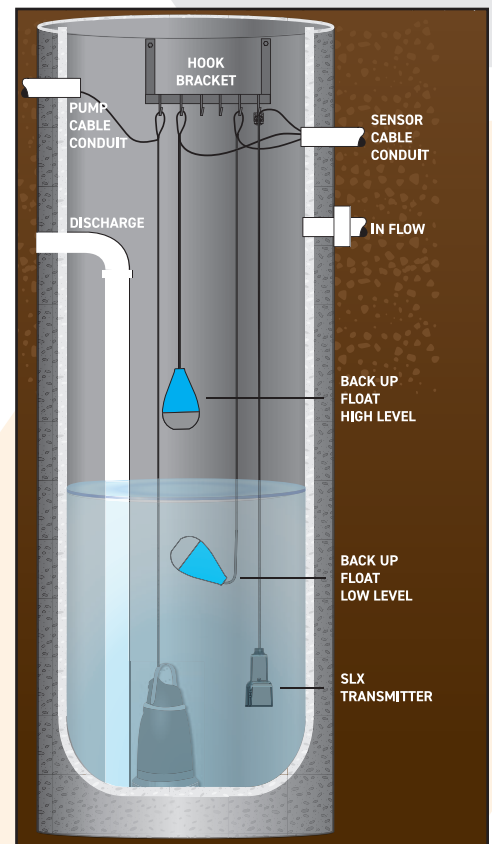

**CSI Controls**

Toll Free: 888-342-5753 • Fax: 218-847-4617  
customer.service@sjeinc.com  
www.csicontrols.com

9500310C 07/20  
© 2018 SJE, Inc. All Rights Reserved.  
CSI CONTROLS is a trademark of SJE, Inc.