


# Minuteman Level Alert™

## Pedestal Mounted Plugger Control with High Water Alarm

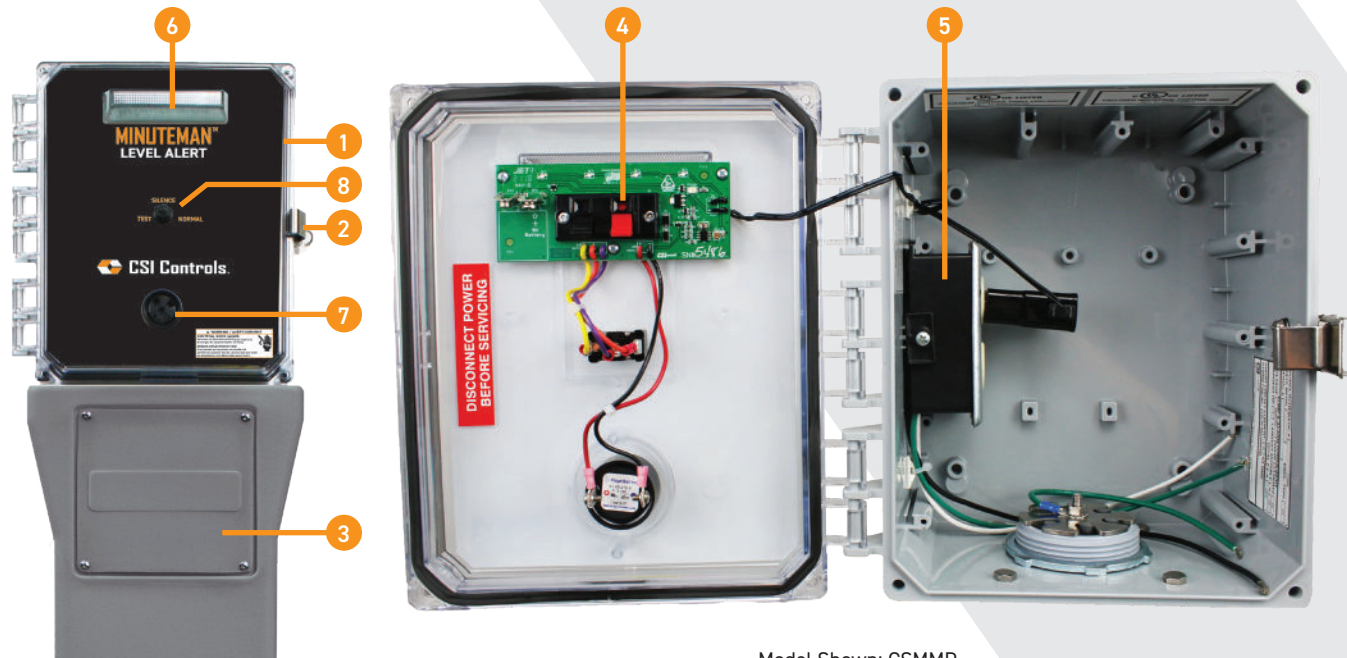

Model Shown: CSMMP

The **Minuteman Level Alert™** is a pedestal mounted, plugger control panel level alarm. The pedestal features an easy access door allowing quick installation and wiring. It is equipped with an internal outlet for piggy-back pump operation and battery back-up alarm system.

### FEATURES

- Battery back-up alarm system (9V battery not included)
- Weatherproof enclosure and pedestal
- Wiring concealed in pedestal (no exposed wires)
- Pedestal fits over a 4 x 4 or is ready for direct burial to 2 ft. below grade
- Low voltage alarm float switch included (15 foot cord)



### OPTIONS

- 230 volt input voltage
- Float switch configurations
- Terminal block for incoming power connection
- Dual power - separate incoming alarm and pump control

### COMPONENTS

1. NEMA 4X enclosure rated for outdoor use
2. Locking latch for added safety
3. Poly-pedestal with access door
4. High level float connection
5. Receptacle outlet for pump switch 115 VAC or 230 VAC piggy-back plug
6. Flashing red LED alarm light
7. Piezo audible alarm
8. External Test/Silence/Normal operation switch



# CSI Controls®

Toll Free: 888-342-5753  
customer.service@sjeinc.com  
www.csicontrols.com

## MINUTEMAN LEVEL ALERT™ PANELS

Part #	Description
CSMM	NEMA 4X alarm with LED alarm light, outlet for piggy-back float installation and 9V battery back-up. Includes a 15 ft. alarm float switch and enclosure mounting feet. Piggy-back pump switch and pedestal not included.
CSMMP	NEMA 4X pedestal mounted alarm with LED alarm light, outlet for piggy-back float installation and 9V battery back-up. Includes a 15 ft. alarm float switch and rubber grommet to seal incoming wires. Piggy-back pump switch not included.
Options	Description
230	230 VAC
D	Dual power - separate incoming power to Pump and Alarm/Control
GF	(1) 15 ft. piggy-back pump switch
NF	No float included - deducts standard 15 ft. alarm float
T	Terminal block incoming power connection

SEE PRICE BOOK FOR LIST PRICE.

## SPECIFICATIONS

**VOLTAGE SUPPLY:** Pump: 115 VAC or 230 VAC 50/60 Hz 1∅  
Control/Alarm: 115 VAC 60 Hz 1∅

**ENCLOSURE:** 10 x 8 x 6 inch (25.4 x 20.3 x 15.2 cm)  
NEMA 4X ultraviolet stabilized thermoplastic rated for indoor/outdoor use

**INNER DOOR:** molded thermoplastic

**LOCKING LATCH:** stainless steel, padlockable

**PRIMARY ALARM FLOAT VOLTAGE:** 12 VDC, 9 volt battery backup

**MOTOR STARTER:** wide angle pump float switch

**PUMP AMPS:** 0-15 Amps

**ALARM HORN:** 83-85 decibel rating

**FLASHING RED ALARM LIGHT:** high intensity LED



Toll Free: 888-342-5753  
customer.service@sjeinc.com  
www.csicontrols.com