

# CS4-20 Level Transmitter

Floatless Level Control for CSI Controls RK Series™ and Power Zone™ Panels

## FEATURES


- Provides continuous level monitoring in level control applications
- Standard 4-20mA signal
- Transmitter wetted components are designed with nonconductive materials to provide electrical isolation barrier
- 22/2 shielded cable with vent tube
- Pipe clamp mounting
- Reverse polarity protected
- Multiple cable lengths available
- Two-year limited warranty

## SPECIFICATIONS

- **Measuring Range:** 0-100 inWC (0-3.63 PSI)
- **Accuracy:** 2% full scale
- **Operating Temperature:** 32-122°F (0-50°C)
- **Output:** 4-20mA, loop powered
- **Excitation Voltage:** 8-32 VDC reverse polarity protected
- **IR Rating:** IP 68 for permanent submersion
- **Sensor Housing Dimensions:** 2.0" diameter x 5.35" length (51mm x 136mm)
- **Cable:** TPE 22 AWG, 2-wire shielded with vent tube

PART NUMBER	DESCRIPTION
1059780	CS4-20, 25 ft. Cable
1059781	CS4-20, 50 ft. Cable

**NOTE:** The CS4-20 Level Transmitter is available only as an option on RK Series™ and Power Zone™ panels.

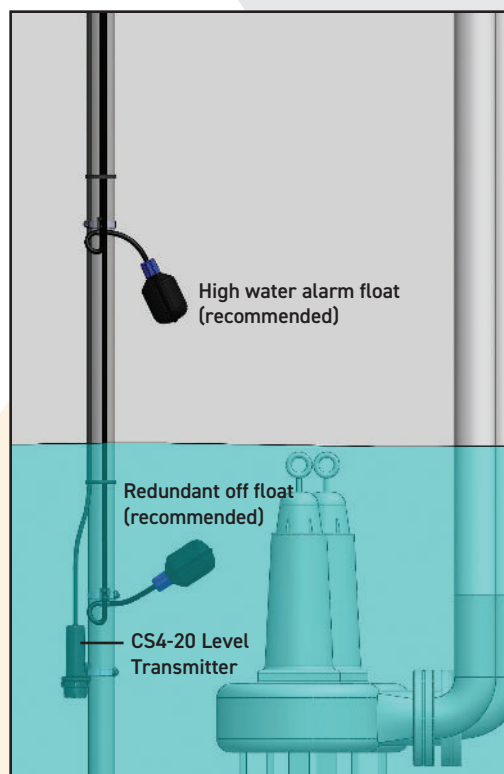

# CSI Controls®

Toll Free: 888-342-5753 • Fax: 218-847-4617  
customer.service@sjeinc.com  
www.csicontrols.com

9500428B 07/19

© 2019 SJE, Inc. All Rights Reserved.  
CSI CONTROLS is a trademark of SJE, Inc.